




V.LOCK Seismic Cable Brace with 45° Angle Brackets

Materials Available	Sizes Available		
	3mm	5mm	6mm
Zinc Plated	485kg ULS	1,046kg ULS	1,489kg ULS
Hot Dip Galvanised			
Stainless Steel 316	380kg ULS	850kg ULS	

Brace Lengths
1 metre
2 metres
3 metres
4 metres
6 metres
10 metres

Suitable for up to M12 anchors.
M16 available upon request.

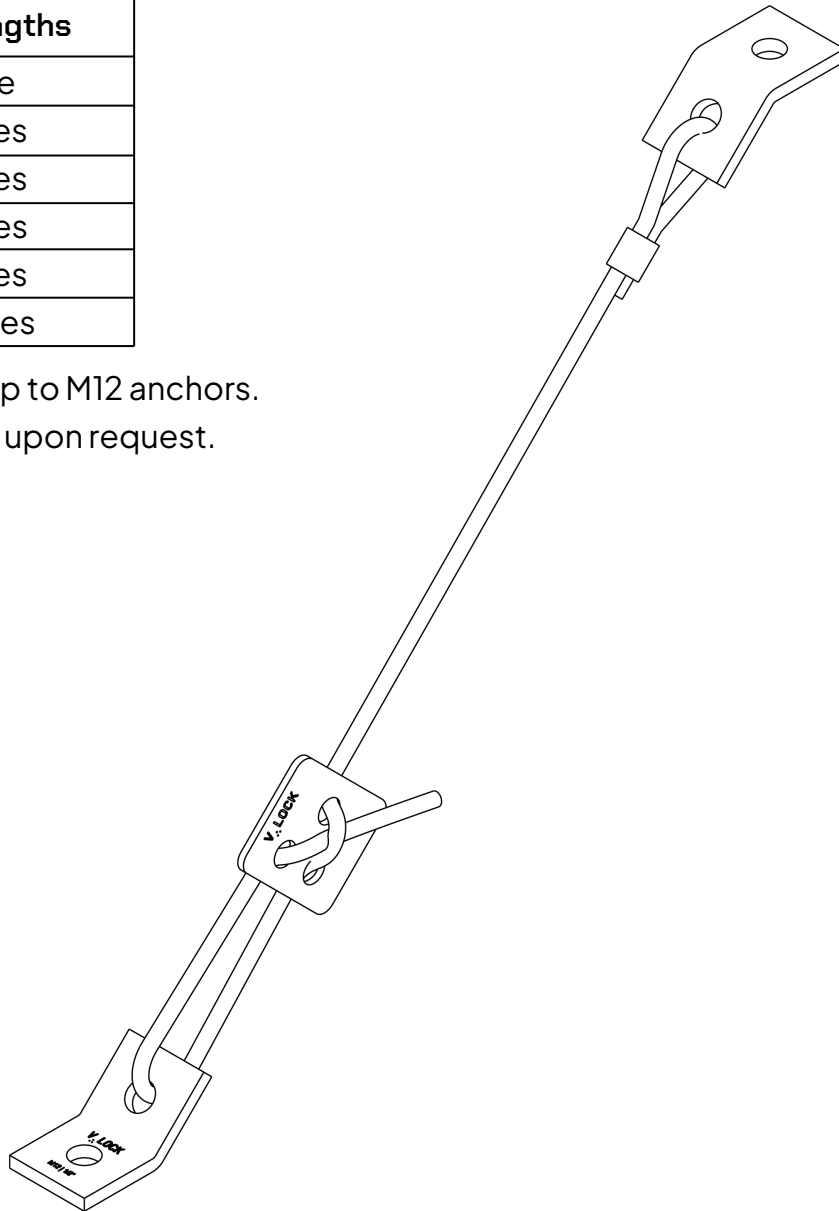

Registered Design
Patented No. 2021107288
Other Patents Pending

ULS has been calculated by applying a reduction factor calculated from AS/NZS 1170.0:2002, Appendix B, which accounts for number of samples tested and variation of test results within the group.

V.LOCK
SEISMIC & SUSPENSION
KMR2021-3242

vaico

31 Whakapirau Rd, Maungaturoto, New Zealand
vaicoglobal.com
Copyright Vaico Global © 2024

V.LOCK Seismic Cable Brace
with 45° Angle Brackets

Drawing No.
VL-AB45
Revision
B