


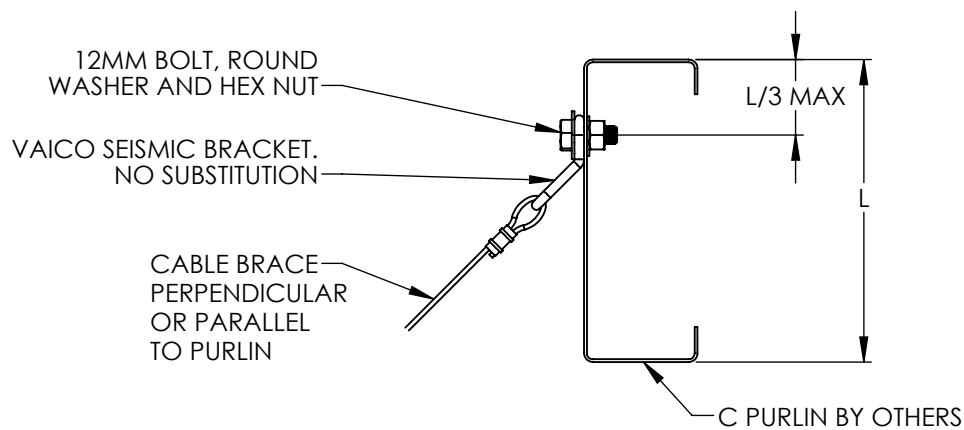

ALLOWABLE CONNECTION CAPACITY

PURLIN		Pmax	
mm	(ga)	kN	kg
2.66	(12.0)	8.92	909
1.81	(14.0)	6.25	637
1.44	(16.0)	4.96	506
1.15	(18.0)	3.94	885
0.88	(20.0)	2.91	655

A. PERPENDICLUAR TO PURLIN

ALLOWABLE CONNECTION CAPACITY

PURLIN		Pmax	
mm	(ga)	kN	kg
2.66	(12.0)	11.51	1173
1.81	(14.0)	8.07	822
1.44	(16.0)	6.41	653
1.15	(18.0)	5.08	518
0.88	(20.0)	3.79	386

B. PARALLEL TO PURLIN

BRACE TO C PURLIN

NOTES:

1. PURLIN TENSILE STRENGTH,
 $f_u = 320 \text{ MPa}$ MINIMUM
2. PURLIN GRADE G250 MINIMUM, AS 1397
3. MAXIMUM SIZE OF BOLT HOLE 14mm
4. M12 TORQUE = 65Nm

vaico

31 Whakapirau Road, Maungaturoto, New Zealand
vaicoglobal.com
Copyright Vaico Global © 2024

BRP1

Brace Connection to C Purlin

Drawing No.

BRP1

Revision

B